

**(19) World Intellectual Property Organization  
International Bureau**



A standard linear barcode is located at the bottom of the page, spanning most of the width. It is used for document tracking and identification.

533974

(43) International Publication Date  
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number  
**WO 2004/042667 A2**

(51) International Patent Classification<sup>7</sup>: G08B 13/194,  
15/00

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

**(21) International Application Number:** PCT/GB2003/004691

(84) **Designated States (regional):** ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(22) International Filing Date: 30 October 2003 (30.10.2003)

(25) Filling Language: English

## English

(26) Publication Language: English

## English


**(30) Priority Data:** 0226002.4 7 November 2002 (07.11.2002) GB

**Published:**

- without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: SURVEILLANCE DEVICE

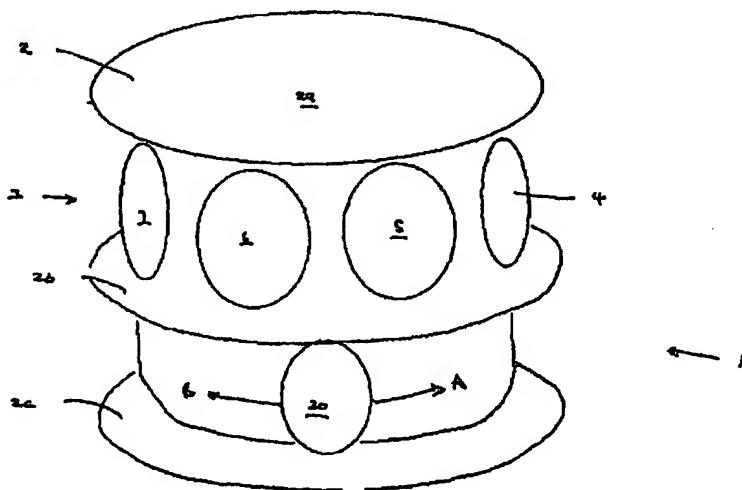

WO 2004/042667 A2

**(57) Abstract:** A surveillance device has a support secured to a structure, a first image collection device secured to the support, a second image collection device and a servo motor, the second image collection device being moveable with respect to the support by the servo motor, the second image collection device having an optical axis whereby the servo motor is constructed and arranged to regulate the direction of the optical axis of the second image collection device. Inherent intelligence in the device or in a remote computer is used to direct the servo motor in accordance with algorithms recognising and analysing motion in the area being monitored by first image collection device.